

Features

- Excellent color rendering (94+ CRI)
- Adjustable CCT from 2700K to 6000K
- Up to 155 lumens per foot performance
- Consumes up to 2.9 watts per foot
- Cuttable every 3.94"
- 32.8 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



2700K-6000K
Tunable CCT

Control Options

- Trulux Tunable CCT Controls
- Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver

Listing / Ratings




TRULUX™ Tunable High Output - 24V

Need custom color temperature lighting at the turn of a dial? Trulux Tunable CCT High Output series is a great option when on the fly color adjustment is a must, or when single CCT options just won't cut it. Adjust color temps from 2700K to 6000K and everything in between to create elegant lighting catered to times of day or application setting.

Technical Information

Series	HTL-TW
Input Voltage	24V
CCT	2700K-6000K Tunable CCT
CRI	94+
Wattage	Up to 2.9W per ft
Lumens	Up to 155Lm per ft
Max Run	32.8 feet
Cutttable	Every 3.94"
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

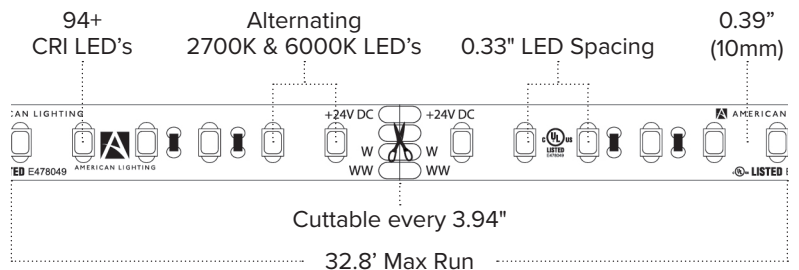

Tunable CCT 2700K to 6000K
up to 2.9W per ft / up to 155Lm per ft

16.4ft Reels



HTL-TW (16.4ft)

Custom Cut



HTL-TW-CC

HTL-TW (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) Standard Power Connectors
Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building a Tunable CCT Trulux System?

See pages (38-39) for compatible Tunable CCT Trulux controllers & accessories

Trulux Tunable CCT Accessories



HD Power Feed (IP54)
TL-4PWR-HD



HD Splice (IP54)
TL-4SPL-HD



HD Linking Cable (IP54)
TL-4JUMP6-HD (6")
TL-4JUMP24-HD (24")

Trulux Tunable CCT Control



Single Zone Push Dial
Wireless RF Wall Controller
TWRF-BATT



4 Zone Touch Slide
RF Wall Controller
TWRF-4Z



4 Zone Touch Slide
DMX Wall Controller
DMX-TW-4Z




4 Zone Remote
RF Remote Control
TWRF-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z

Trulux Tunable CCT Set-up



Push Dial Controller
(Single zone)



Adaptive LED Driver
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required)



Trulux Tape Light